

Industrial Circular connectors



RD24 cables & connectors

We have extended our range of circular connectors provided with the addition of the RD24 series. This series is divided into over-molded cables, field wiring assembly, and panel mount type, offered with 3+PE or 6+PE poles. Screw joints and soldering termination is available for connecting systems. When in a locked condition, this series is sealed to an IP68 rating.

- Degree of protection IP68
- 1+PE, 2+PE, 3+PE, 6+PE poles are available
- TPU over-molded
- Anti-vibration locking screw design
- Cable length customized, PUR and PVC cable options

RD24

Quick Search Table

Locking type	Fix screw							
Available Coding	A-Coding				B-Coding			
Rated Current	12A				8A			
Voltage	600V				250V			
Wire Gauge / size	18~14AWG / 0.75mm ² , 1.0~2.0mm ²				22~16AWG / 0.34~1.5mm ²			

Pin layout								
	Male	Female	Male	Female	Male	Female	Male	Female

RD24 cables & connectors

1+PE(1+1)

2+PE(2+1)

3+PE(3+1)

6+PE(6+1)

Molded Cable



Male Molded Cable Straight	424	-	424	-	424	-	424	-
Female Molded Cable Straight	-	425	-	425	-	425	-	425

Assembly Type



Male Field Wirable Assembly Straight Solder	426	-	426	-	426	-	426	-
Female Field Wirable Assembly Straight Solder	-	427	-	427	-	427	-	427


Panel Mount Type




Male Panel Mount Solder Front Fastened	428	-	428	-	428	-	428	-
Male Panel Mount Screw joint Front Fastened	429	-	429	-	429	-	-	-
Female Panel Mount Screw joint Front Fastened	-	430	-	430	-	430	-	-

How to Order Part Number

■ RD24 Series with cable molded

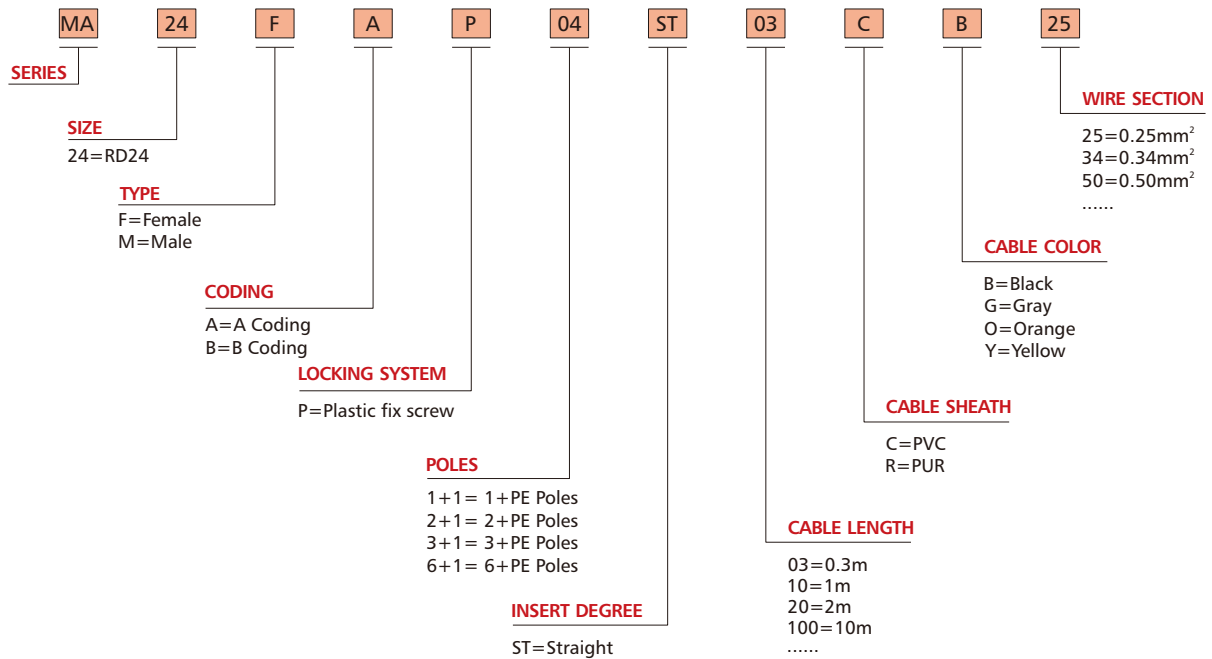


■ RD24 Series Assembly / Panel-mount type

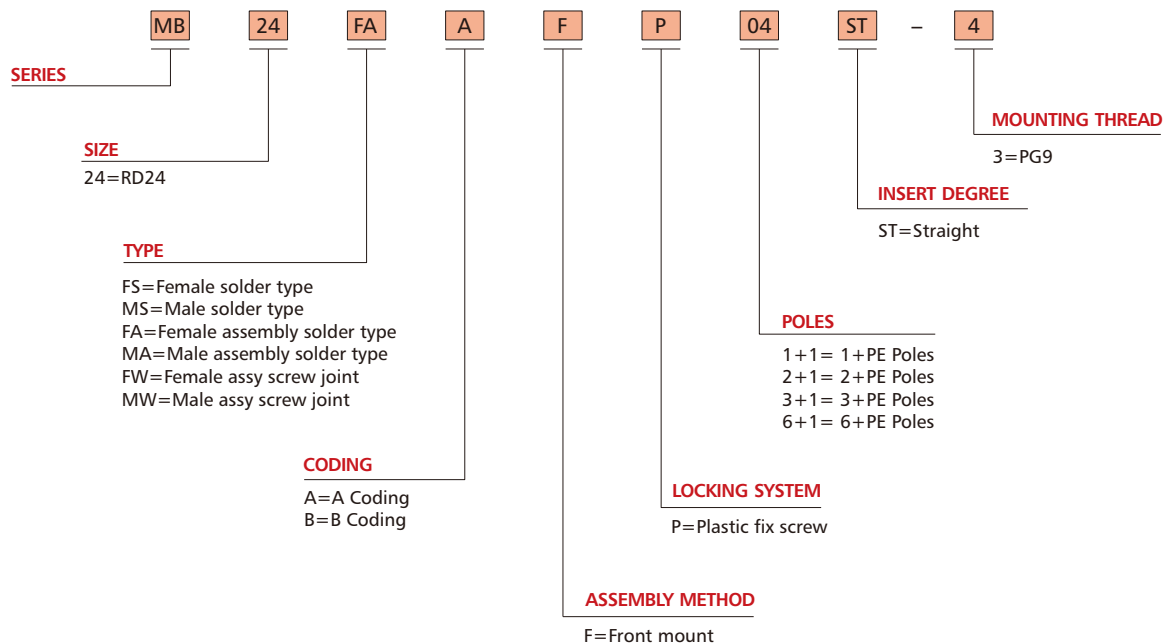

RD24 Male Molded Cable, Straight

- Connector series: RD24
- Gender: Male
- Locking type: Fix screw
- Mounting type: Straight
- Part No.: MA24M*P***STXXXXXX

* refers to coding type
 *** refers to pins number
 X refers to cable specification

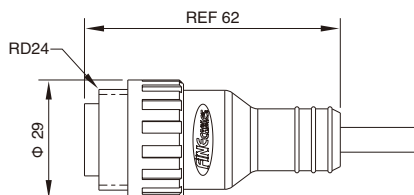

General information

Ambient temperature:	-40℃ ~ +80℃(fixed installation) -20℃ ~ +80℃(flexible installation)
Connector insert:	PBT
Connector contacts:	Brass with silver plated
Coupling nut/screw:	PA

Insulation resistance:	≥ 100MΩ
Contact resistance :	≤ 5mΩ
Shielding:	Unavailable
IP rating:	IP68 in locked condition
Mating endurance:	>500 cycles

Electrical data & Mechanical data

Contacts		Rated current	Voltage		Wire gauge / size		Cable jacket	Part No.
			A/C	D/C	AWG	mm ²		
1+PE (1+1)	 A-Coding	12A	600V	600V	18~14AWG	0.75	PUR/PVC	MA24MAP1+1STXXXXXX
2+PE (2+1)	 A-Coding	12A	600V	600V	18~14AWG	0.75	PUR/PVC	MA24MAP2+1STXXXXXX
3+PE (3+1)	 A-Coding	12A	600V	600V	18~14AWG	0.75	PUR/PVC	MA24MAP3+1STXXXXXX
6+PE (6+1)	 B-Coding	8A	250V	250V	22~16AWG	0.34~1.5	PUR/PVC	MA24MBP6+1STXXXXXX

Note: X refers to cable specification


Remarks

- Please refer to Page 578 for the Conversion between American Wire Gauge AWG and Wire Cross-section mm².
- Please refer to Page 423 for products' part number encoding rule.

RD24 Female Molded Cable, Straight

- Connector series: RD24
- Gender: Female
- Locking type: Fix screw
- Mounting type: Straight
- Part No.: MA24F*P***STXXXXXX

* refers to coding type
*** refers to pins number

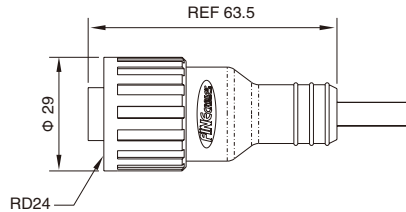

■ General information

Ambient temperature:	-40℃ ~ +80℃(fixed installation) -20℃ ~ +80℃(flexible installation)
Connector insert:	PBT
Connector contacts:	Brass with silver plated
Coupling nut/screw:	PA
Seal / O-ring:	Epoxy resin / EPDM

Insulation resistance:	≥ 100MΩ
Contact resistance :	≤ 5mΩ
Shielding:	Unavailable
IP rating:	IP68 in locked condition
Mating endurance:	>500 cycles

■ Electrical data & Mechanical data

Contacts		Rated current	Voltage		Wire gauge / size		Cable jacket	Part No.
			A/C	D/C	AWG	mm ²		
1+PE (1+1)	 A-Coding	12A	600V	600V	18~14AWG	0.75	PUR/PVC	MA24FAP1+1STXXXXXX
2+PE (2+1)	 A-Coding	12A	600V	600V	18~14AWG	0.75	PUR/PVC	MA24FAP2+1STXXXXXX
3+PE (3+1)	 A-Coding	12A	600V	600V	18~14AWG	0.75	PUR/PVC	MA24FAP3+1STXXXXXX
6+PE (6+1)	 B-Coding	8A	250V	250V	22~16AWG	0.34~1.5	PUR/PVC	MA24FBP6+1STXXXXXX

Note: X refers to cable specification


■ Remarks

- Please refer to Page 578 for the Conversion between American Wire Gauge AWG and Wire Cross-section mm².
- Please refer to Page 423 for products' part number encoding rule.

RD24 Male Field Wirable Assembly, Straight, Solder

- Connector series: RD24
- Gender: Male
- Locking type: Fix screw
- Mounting type: Straight
- Part No.: MB24MA*FP***ST-3

* refers to coding type
*** refers to pins number

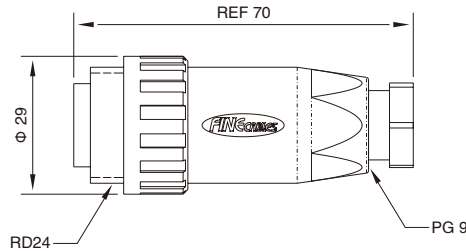

General information

Ambient temperature:	-25℃ ~ +125℃
Connector insert:	PBT
Connector contacts:	Brass with silver plated
Coupling nut/screw:	PA
Seal / O-ring:	Epoxy resin / EPDM
Termination type:	Solder

Insulation resistance:	≥ 100MΩ
Contact resistance:	≤ 5mΩ
Shielding:	Unavailable
Suitable cable Dia.:	PG9: 6~8mm
IP rating:	IP 68 in locked condition
Mating endurance:	>500 cycles

Electrical data & Mechanical data

Contacts		Contacts termination	Rated current	Voltage		Wire gauge / size		Wire insulation	Part No.
				A/C	D/C	AWG	mm ²		
1+PE (1+1)	 A-Coding	Solder version	12A	600V	600V	18~14AWG	0.75	PVC wire or customized	MB24MAAFP1+1ST-3
2+PE (2+1)	 A-Coding	Solder version	12A	600V	600V	18~14AWG	0.75	PVC wire or customized	MB24MAAFP2+1ST-3
3+PE (3+1)	 A-Coding	Solder version	12A	600V	600V	18~14AWG	0.75	PVC wire or customized	MB24MAAFP3+1ST-3
6+PE (6+1)	 B-Coding	Solder version	8A	250V	250V	22~16AWG	0.34~1.5	PVC wire or customized	MB24MABFP6+1ST-3


Remarks

- Please refer to Page 578 for the Conversion between American Wire Gauge AWG and Wire Cross-section mm².
- Please refer to Page 423 for products' part number encoding rule.

RD24 Female Field Wirable Assembly, Straight, Solder

- Connector series: RD24
- Gender: Female
- Locking type: Fix screw
- Mounting type: Straight
- Part No.: MB24FA*FP***ST-3

* refers to coding type
*** refers to pins number

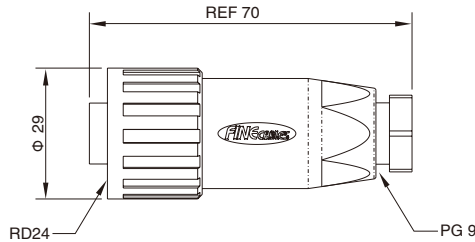

General information

Ambient temperature:	-25℃ ~ +125℃
Connector insert:	PBT
Connector contacts:	Brass with silver plated
Coupling nut/screw:	PA
Seal / O-ring:	Epoxy resin / EPDM
Termination type:	Solder

Insulation resistance:	≥ 100MΩ
Contact resistance:	≤ 5mΩ
Shielding:	Unavailable
Suitable cable Dia.:	PG9: 6~8mm
IP rating:	IP 68 in locked condition
Mating endurance:	>500 cycles

Electrical data & Mechanical data

Contacts		Contacts termination	Rated current	Voltage		Wire gauge / size		Wire insulation	Part No.
				A/C	D/C	AWG	mm ²		
1+PE (1+1)		Solder version	12A	600V	600V	18~14AWG	0.75	PVC wire or customized	MB24FAAFP1+1ST-3
2+PE (2+1)		Solder version	12A	600V	600V	18~14AWG	0.75	PVC wire or customized	MB24FAAFP2+1ST-3
3+PE (3+1)		Solder version	12A	600V	600V	18~14AWG	0.75	PVC wire or customized	MB24FAAFP3+1ST-3
6+PE (6+1)		Solder version	8A	250V	250V	22~16AWG	0.34~1.5	PVC wire or customized	MB24FABFP6+1ST-3


Remarks

- Please refer to Page 578 for the Conversion between American Wire Gauge AWG and Wire Cross-section mm².
- Please refer to Page 423 for products' part number encoding rule.

RD24 Male Panel Mount, Solder, Front fastened

- Connector series: RD24
- Gender: Male
- Locking type: Fix screw
- Mounting type: Front fastened
- Part No.: MA24MS*FP***ST

* refers to coding type
*** refers to pins number

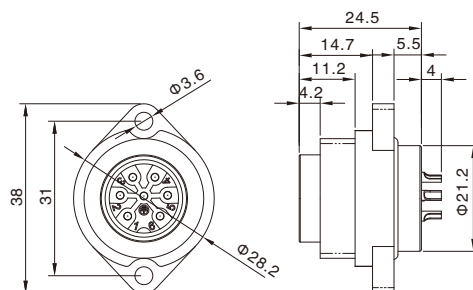

General information

Ambient temperature: -25°C ~ +125 °C

Connector insert: PBT

Connector contacts: Brass with silver plated

Seal / O-ring: EPDM

Insulation resistance: $\geq 100M\Omega$

Contact resistance: $\leq 5m\Omega$

Shielding: Unavailable

IP rating: IP 68 in locked condition

Mating endurance: >500 cycles

Electrical data & Mechanical data

Contacts		Contacts termination	Rated current	Voltage		Wire gauge / size		Wire insulation	Part No.
				A/C	D/C	AWG	mm ²		
1+PE (1+1)		Solder version	12A	600V	600V	18~14AWG	0.75	PUR/PVC	MA24MSAFP1+1ST
2+PE (2+1)		Solder version	12A	600V	600V	18~14AWG	0.75	PUR/PVC	MA24MSAFP2+1ST
3+PE (3+1)		Solder version	12A	600V	600V	18~14AWG	0.75	PUR/PVC	MA24MSAFP3+1ST
6+PE (6+1)		Solder version	8A	250V	250V	22~16AWG	0.34~1.5	PUR/PVC	MA24MSBFP6+1ST



Remarks

- Please refer to Page 578 for the Conversion between American Wire Gauge AWG and Wire Cross-section mm².
- Please refer to Page 423 for products' part number encoding rule.

RD24 Male Panel Mount, Screw joint, Front fastened

- Connector series: RD24
- Gender: Male
- Locking type: Fix screw
- Mounting type: Front fastened
- Part No.: MA24MWAFP***ST

*** refers to pins number



General information

Ambient temperature:	-25℃ ~ +125℃
Connector insert:	PBT
Connector contacts:	Brass with silver plated
Coupling nut/screw:	PBT
Seal / O-ring:	Epoxy resin / EPDM
Termination type:	Screw

Insulation resistance:	≥ 100MΩ
Contact resistance:	≤ 5mΩ
Shielding:	Unavailable
IP rating:	IP 68 in locked condition
Mating endurance:	>500 cycles

Electrical data & Mechanical data

Contacts		Contacts termination	Rated current	Voltage		Wire gauge / size		Wire insulation	Part No.
				A/C	D/C	AWG	mm ²		
1+PE (1+1)	A-Coding	Screw joint	12A	600V	600V	18~14AWG	0.75	PVC wire or customized	MA24MWAFP1+1ST
2+PE (2+1)	A-Coding	Screw joint	12A	600V	600V	18~14AWG	0.75	PVC wire or customized	MA24MWAFP2+1ST
3+PE (3+1)	A-Coding	Screw joint	12A	600V	600V	18~14AWG	0.75	PVC wire or customized	MA24MWAFP3+1ST



Remarks

- Please refer to Page 578 for the Conversion between American Wire Gauge AWG and Wire Cross-section mm².
- Please refer to Page 423 for products' part number encoding rule.

RD24 Female Panel Mount, Screw joint, Front fastened

- Connector series: RD24
- Gender: Female
- Locking type: Fix screw
- Mounting type: Front fastened
- Part No.: MA24FWAFP***ST

*** refers to pins number



General information

Ambient temperature:	-25℃ ~ +125℃
Connector insert:	PBT
Connector contacts:	Brass with silver plated
Coupling nut/screw:	PBT
Seal / O-ring:	Epoxy resin / EPDM
Termination type:	Screw

Insulation resistance:	≥ 100MΩ
Contact resistance:	≤ 5mΩ
Shielding:	Unavailable
IP rating:	IP 68 in locked condition
Mating endurance:	>500 cycles

Electrical data & Mechanical data

Contacts		Contacts termination	Rated current	Voltage		Wire gauge / size		Wire insulation	Part No.
				A/C	D/C	AWG	mm ²		
1+PE (1+1)	A-Coding	Screw joint	12A	600V	600V	18~14AWG	0.75	PVC wire or customized	MA24FWAFP1+1ST
2+PE (2+1)	A-Coding	Screw joint	12A	600V	600V	18~14AWG	0.75	PVC wire or customized	MA24FWAFP2+1ST
3+PE (3+1)	A-Coding	Screw joint	12A	600V	600V	18~14AWG	0.75	PVC wire or customized	MA24FWAFP3+1ST

Remarks

- Please refer to Page 578 for the Conversion between American Wire Gauge AWG and Wire Cross-section mm².
- Please refer to Page 423 for products' part number encoding rule.